






MAX BLANK
HIGH QUALITY

BELFORT S

wood

Technical specifications of the system fireplace:

measurements (cm)	width	height	depth
stove	128	165	52
combustion chamber	61	24	27
fire glass	59,5	30	
fire door	85	47	
flue pipe connection Ø 15 to → or ↑ height to pipe socket above			96,5
outside air connection Ø 10 to → or ↓ depth to mid connection vertical			20
total weight	chamotte bricks	heat accumulator	
684 kg	30 kg	162 kg	
data for	wood stove		
nominal heat output	6,7 kW		
output range	8 - 5 kW		
efficiency	80%		
heating capability*	70 - 350 m ³		
amount of fuel	2,0 kg / h		
fire duration	- 4 h		
heat release	- 9 / - 15 h		
flue gas flow volume	6,6 g / s		
exhaust °C (nozzle)	296 °C		
min/max feed press.	12 / 15 Pa		
CO (13%/O ₂) [mg/m ³]	1244		
CO (13%/O ₂) [%]	0,100		
dust (13%/O ₂) [mg/m ³]	21		
NO _x (13%/O ₂) [mg/m ³]	163		
CxHy (13%/O ₂) [mg/m ³]	66		
wall distance, rear	4 cm		
wall distance, side	6 cm		
distance to the front	100 cm		

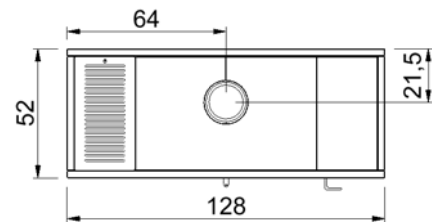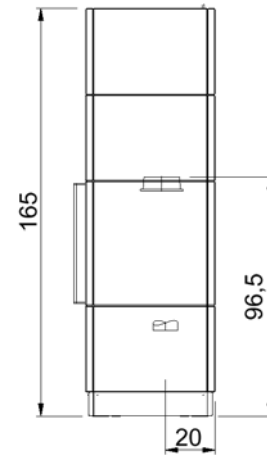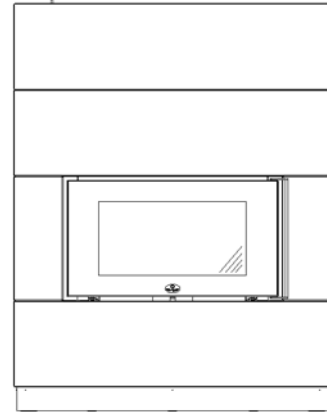

Fulfils the latest standards in burning wood and wood-briquettes (please see applicable standards).

Please check the instruction manual for this wood burning stove.

Suitable for multiple chimneys.

* depending on stove location in the living area, room isolation, height of the room and amount of fuel

emission value at 50 cm flue pipe outlet

Subject to alterations; errors including printer's errors.

Our specialised stove builders and retailers will assist you with practical advice.

System-fireplace, model Belfort S

ENR	model	delivery time	
378-2101	Belfort S ↑ <ul style="list-style-type: none"> • door cover anthracite • door facet stainless steel • surrounded at 4 sides by natural stone white-cream smooth • door hinge at the left hand side 	6	
378-2601	Belfort S ↑ <ul style="list-style-type: none"> • door cover anthracite • door facet stainless steel • surrounded at 4 sides by natural stone cream grooved • door hinge at the left hand side 	6	
378-2201	Belfort S ↑ <ul style="list-style-type: none"> • door cover anthracite • door facet stainless steel • surrounded at 4 sides by natural stone white-cream smooth with smooth edges • door hinge at the left hand side 	6	
378-2099	Belfort S ↑ <ul style="list-style-type: none"> • choose the default stove body form the above mentioned types • middle stripes front & side to be chosen out of: <ul style="list-style-type: none"> - natural stone white-cream smooth - natural stone white-cream smooth with smooth edges - natural stone cream grooved - natural stone cream hewed - natural stone brushed slate 	6	
accessories for the system-fireplace			
303 378-916	8 piece additional heat accumulation element with 162 kg you can find more Belfort-accessories in the list of accessories		
29 378 311	floor protector stainless steel (see accessories)		
29 378 400	floor protector stainless glass (see accessories)		
	outside air connection to the bottom (is included in scope of delivery)		
	lid bundle I or II for smoke flue back/top (is included in scope of delivery)		
	contents description on the last pages		
special features of the system-fireplace, model Belfort S			
<ul style="list-style-type: none"> • quick assembling within 1/2 day for 2 people • no dirt or dust during construction • no filling, no glue, no cementing • saves heat the natural way • dispenses heat on a large surface spread over 4 sides • sustainable through natural materials • degradable and movable without damaging the fire place • comfortable and self-closing fire door • can take fire logs up to 55 cm • fire technology without high-maintenance dust filters • optional the heat accumulation block <p style="text-align: center;">Please also look up the features of the natural stone collection!</p>			