



MEERI 1



MEERI 3


PRODUCT INFORMATION:

Thermal energy:	25 kg	82-92 kWh
	20 kg	66-74 kWh


PRODUCT NUMBER:

Product	Product number	Weight kg	Height mm
MEERI 1	606571-1	3395	1715
MEERI 3	606571-3	3460	1715

LAYOUT DRAWINGS:

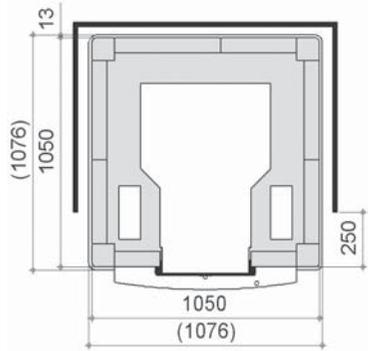

MEERI 1

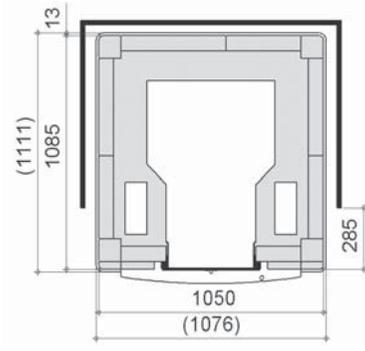

MEERI 3

BOTTOM PLINTH:

MEERI 1	200550	215	70
MEERI 3	200551	215	70

NEEDED FOR ASSEMBLY:

* Mortar 2 x 25 kg (not included in NunnaUuni delivery)

(...), Bottom plinth dimensions

PRODUCT INFORMATION

	BAKING OVEN / BAKING SPACE		FIREWOOD			FLUE CALCULATION VALUES (2)					
	Width [mm]	Depth [mm]	Length fireplace / cooker [cm]	Max amount of wood [kg] (1)	Length baking oven [cm]	Flue gas temperature [°C]	Min. flue draught [Pa]	Mass flow [g/s]	Burning heat output [kW]	Flue connection [A/B] Ø	Burning air approx. m³/h
Meeri	420/600	780	50	25/20	50	195	16	30,4	37,6	180	90

FLUE CONNECTION TABLE

	RECOMMENDED FLUE [mm]				FLUE CONNECTION MEASUREMENTS [mm]			INCOMING AIR		
	approx. 150x150	approx. 150x200	approx. 150x300	round Ø	[A]	[B]	[C] (3)	Incoming air pipe location L [mm]	Replacement air unit	HRT
Meeri	-	x	x	180-210	150-200	300	300 (round connection: 260)	910	900307	-
coal combustion (4)	x	-	-	130-150	100	100	840	-	-	-

SAFETY DISTANCES TO COMBUSTIBLE MATERIALS

	Not tested	
	Behind	On the sides
Meeri	-	-

- 1) 25 kg = Heated from cold, 20 kg = Heated every day
- 2) The flue calculation values apply for countries that require flue calculation in accordance with the DIN 18160 and DIN EN 13384 standards. It is recommendable to contact chimney sweeper beforehand.
- 3) When installing with bottom plinth, flue connection (+70mm) will be raised according to thickness of the plinth.
- 4) Connection to two flues is recommended, in which case a separate connection pipe must be ordered.
When connection is to one flue, a separate opening for the connection of combustion gases of the embers is not made.

Take a notice of the countryspecific approvals in section 3

NOTES!

The flue heat category required by the fireplace is T350.

The recommended minimum flue height is 5 m with Ø180 mm. In countries where the flue calculation is required, should the calculation be done according to the instructions and regulations of the flue calculation.

A damper designed for adjusting the draft is always recommended for a flue connection or flue.

Country- and region-specific regulations must be adhered to when installing the fireplace

