

Search

OK

## NAVIGATION

SEGUIN | SAPHIR


Reference PS/C

DESCRIBE US ABOUT YOUR PROJECT

Features

- Output 8 – 11 kw
- CO Emission (%CO à 13% O<sub>2</sub>) 0,277 %
- Efficiency 82 %
- Logs 50 cm
- Weight 165 kg
- Heating volume (as an indication) until 320 m<sup>3</sup>
- Top or rear flue exit Ø 150
- All cast iron construction
- Combustion chamber: double-walled in vermiculite and cast iron

- A front and a side loading doors.
- Two adjustable primary air inlets :
  - For an optimal combustion
  - To keep the glass clean
- Outside air connection (optional)
- Double combustion with fixed flue
- Separate ashpan door.

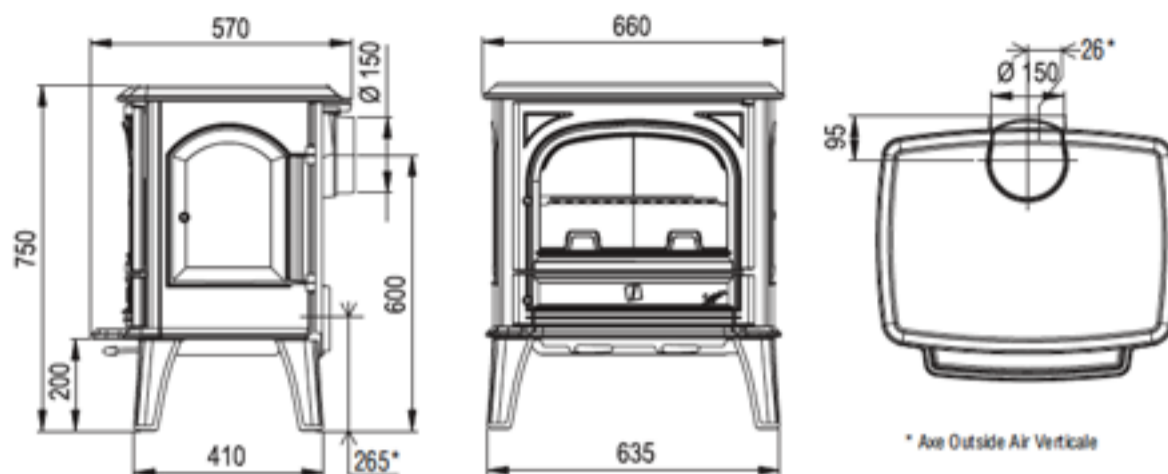

Stove EN 13240 approved  
Defra Approved For Smoke Control Areas



CONTACT YOUR DEALER

ADD TO FAVORITES

Termed of use, contact us, newsletter, retailers area, recruitment, press area, recording guarantees, espace presse



Groupe Seguin Duteriez

